



# Split System Heat Pump Product Data


---

## **XL20i**

**4TWZ0024, 036, 048 & 060**

**with ComfortLink™ II and Charge Assist™**

**2, 3, 4 & 5 Tons**

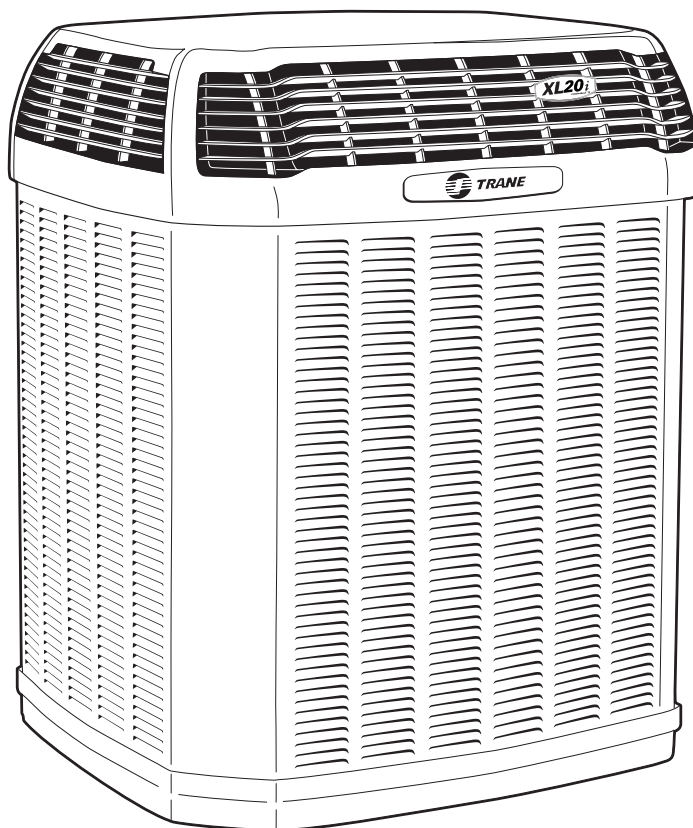

---

**PUB. NO. 22-1826-01**



## Features and Benefits

---

- Two **CLIMATUFF®** compressors
- Efficiency up to **19.0 SEER** and **9.0 HSPF**
- All aluminum **SPINE FIN™** coil
- **WEATHERGUARD™ II** top shields unit
- **WEATHERGUARD™** fasteners
- **QUICK-SESS™** cabinet, service access and refrigerant connections with full coil protection
- **DURATUFF™** base, fast complete drain, weather proof
- **COMFORT-R™** mode approved
- **COMFORTLINK™ II** system, only two wire control connection
- **CHARGE ASSIST™** fast/accurate charging every time
- Glossy corrosion resistant finish
- Internal compressor high/low pressure & temperature protection
- Start kit standard
- 50% or 100% capacity modulation
- Compressor sump heat
- Electronic compressor control
- Liquid line filter/drier
- Tarpaulin gray cabinet with anthracite gray top
- Low sound with advanced fan system and compressor sound insulator
- Variable speed fan motor
- Electronic Expansion Valve with diagnostics
- Demand Defrost Control with diagnostics
- XL Seacoast shield
- Service valve cover
- R-410A refrigerant
- S.E.E.T. design testing
- 100% line run test
- Low ambient cooling to 55°F as shipped
- **10-year limited warranty on compressor, coil, and internal functional parts (Residential Use)**
- **Extended warranties available**

# Contents

---

<b>Features and Benefits</b>	<b>2</b>
<b>General Data</b>	<b>4</b>
Product Specifications	4
A-weighted Sound Power Level [dB(A)]	4
Accessory Description and Usage	5
ARI Standard Capacity Rating Conditions	5
<b>Model Nomenclature</b>	<b>6</b>
<b>Electrical Data</b>	<b>7</b>
<b>Dimensions</b>	<b>10</b>
<b>Mechanical Specification Options</b>	<b>11</b>



# General Data

## Product Specifications

Model No. ①	4TWZ0024A1	4TWZ0036A1	4TWZ0048A1	4TWZ0060A1
Electrical Data V/Ph/Hz ②	230/1/60	230/1/60	230/1/60	230/1/60
Min Cir Ampacity	14	20	26	35
Max Fuse Size (Amps)	20	30	40	60
Compressors	2 - CLIMATUFF®	2 - CLIMATUFF®	2 - CLIMATUFF®	2 - CLIMATUFF®
RL AMPS - LR AMPS	8.7 - 58	14.5 - 61.5	18.6 - 93.4	23.4 - 128.7
Outdoor Fan FL Amps	2.80	2.80	2.80	2.80
Fan HP	1/3	1/3	1/3	1/3
Fan Dia (inches)	27.6	27.6	26.6	26.6
Coil	Spine Fin™	Spine Fin™	Spine Fin™	Spine Fin™
Refrigerant R-410A	10/1-LB/OZ	11/3-LB/OZ	16/12-LB/OZ	15/13-LB/OZ
Line Size - (in.) O.D. Gas ③	5/8	3/4	3/4	3/4
Line Size - (in.) O.D. Liquid ③	3/8	3/8	3/8	3/8
Dimensions H x W x D (Crated)	57.4 x 35.1 x 38.7	57.4 x 35.1 x 38.7	57.4 x 35.1 x 38.7	57.4 x 35.1 x 38.7
Weight - Shipping	390	395	480	480
Weight - Net	340	345	430	430
Start Components	YES	YES	YES	YES
Sound Enclosure	YES	YES	YES	YES
Compressor Sump Heat	YES	YES	YES	YES
<b>Optional Accessories: ④</b>				
Rubber Isolator Kit	BAYISLT101	BAYISLT101	BAYISLT101	BAYISLT101
Snow Leg - Base & Cap 4" High	BAYLEGS002	BAYLEGS002	BAYLEGS002	BAYLEGS002
Snow Leg - 4" Extension	BAYLEGS003	BAYLEGS003	BAYLEGS003	BAYLEGS003
Extreme Condition Mounting Kit	BAYECMT023	BAYECMT004	BAYECMT004	BAYECMT004
Vertical Discharge Air Kit Base 4	BAYVDTA003	BAYVDTA004	BAYVDTA004	BAYVDTA004
Auto Charge Solenoid Kit	BAYCAKT001	BAYCAKT001	BAYCAKT001	BAYCAKT001
24 Volt Wiring Harness	BAYACHP024A	BAYACHP024A	BAYACHP024A	BAYACHP024A
Refrigerant Lineset ⑤	TAYREFLN9*	TAYREFLN7*	TAYREFLN7*	TAYREFLN7*

① Certified in accordance with the Air-Source Unitary Heat Pump Equipment certification program which is based on ARI Standard 210/240.

② Calculated in accordance with N.E.C. Only use HACR circuit breakers or fuses.

③ Standard line lengths - 80'. Standard lift - 25' Suction and Liquid line.

For Greater lengths and lifts refer to refrigerant piping software Pub# 32-3312-01. (\*denotes latest revision)

④ For accessory description and usage, see page 5.

⑤ \* = 15, 20, 25, 30, 40 and 50 foot lineset available.

## A-weighted Sound Power Level [dB(A)]

MODEL	SOUND POWER LEVEL [dB(A)]		A-WEIGHTED FULL OCTAVE SOUND POWER LEVEL dB - [dB(A)] High Stage							
	Low Stage Overall	High Stage Overall	63	125	250	500	1000	2000	4000	8000
4TWZ0024A1	62	70	51.4	52.3	60.1	61.8	63.7	64.9	56.6	50
4TWZ0036A1	70	72	51.3	55.5	66.2	65.3	64.9	64.7	57.9	53.6
4TWZ0048A1	71	76	51.3	55.8	68.2	68.5	69.5	72	58	50.9
4TWZ0060A1	71	76	50	58.2	66.3	70	70.1	70.8	60.7	52.4

Note: Tested in accordance with ARI Standard 270.95. (Not listed with ARI)

# General Data

---

## Accessory Description and Usage

**24 Volt Wiring Harness** — Used to wire a communicating outdoor unit to an existing 24 Volt indoor section.

**Charge Assist™ Solenoid Kit** — fast/accurate charging every time.

**Rubber Isolators** — 5 large rubber donuts to isolate condensing unit from transmitting energy into mounting frame or pad. Use on any application where sound transmission needs to be minimized.

**Extreme Condition Mount Kit** — Bracket kits to securely mount condensing unit to a frame or pad without removing any panels. Use in areas with high winds, or on commercial roof tops, etc.

**Low Ambient Cooling** — For low ambient cooling below 55° see Application Guide SSC-APG005-EN.

## ARI Standard Capacity Rating Conditions

### ARI STANDARD 210/240 RATING CONDITIONS —

- (A) Cooling 80°F DB, 67°F WB air entering indoor coil, 95°F DB air entering outdoor coil.
- (B) High Temperature Heating 47°F DB, 43°F WB air entering outdoor coil, 70°F DB air entering indoor coil.
- (C) Low Temperature Heating 17°F DB, 15°F WB air entering outdoor coil, 70°F DB air entering indoor coil.
- (D) Rated indoor airflow for heating is the same as for cooling.

**ARI STANDARD 270 RATING CONDITIONS** — (Noise rating numbers are determined with the unit in cooling operation.) Standard Noise Rating number is at 95°F outdoor air.



ARI Standard  
210/240 UHP





# Model Nomenclature

## Outdoor Units

Refrigerant Type	4	T	W	Z	0	3	6	A	1	0	0	A	A
2 = R-22													
4 = R-410A													
TRANE													
Product Type													
W = Split Heat Pump													
T = Split Cooling													
Product Family													
Z = Leadership – Two Stage													
X = Leadership													
R = Replacement/Retail													
B = Basic													
A = Light Commercial													
Family SEER													
0 = 10    3 = 13    6 = 16													
1 = 11    4 = 14    8 = 18													
2 = 12    5 = 15    9 = 19													
Split System Connections 1-6 Tons													
0 = Brazed													
Nominal Capacity in 000s of BTUs													
Major Design Modifications													
Power Supply													
1 = 200-230/1/60 or 208-230/1/60													
3 = 200-230/3/60													
4 = 460/3/60													
Secondary Function													
Minor Design Modifications													
Unit Parts Identifier													

## Air Handlers – Residential

Refrigerant Type	4	T	E	E	3	C	0	5	A	1	0	0	A	A
4 = R-410A														
2 = R-22														
Application														
TE = Fully Convertible														
TG = Semi Convertible														
TF = Front Return														
TV = Vertical														
Product Family														
E = Leadership – Variable Speed														
P = Leadership														
C = Replacement/Retail														
B = Basic														
Flow Control														
3 = Nonbleed TXV														
4 = FCCV*														
Feature Identifier														
0 = Standard Unit														
F = Air-Tite™														
D = Integrated Whole House Air Cleaner														
C = Communicating Air Cleaner														
Model Number Distinguisher														
Major Design Modifications														
Power Supply														
1 = Single Phase														
Electrical Connection														
0 = Pig Tails														
B = Circuit Breaker														
D = Pull Disconnect														
Future Option – Factory Installed Heater Nominal KW Value														
Minor Design Modifications														
Unit Parts Identifier														

NOTE: There will be a phase-in of new model numbers for new air handlers over next 2 years.  
\*Shipped with R-22 FCCV

## Gas Furnaces

Furnace Configuration	T	U	D	2	B	0	8	0	A	C	V	3	A	A
TU = Upflow/Horizontal														
TD = Downflow/Horizontal														
Type														
E = 80% Induced Draft Standard														
D = 80% Induced Draft Premium														
C = 90% Condensing Standard														
X = 90% Condensing Premium														
H = 95% Condensing Premium														
Number of Heating Stages														
1 = Single Stage														
2 = Two Stage														
3 = Three Stage														
Cabinet Width														
A = 14.5" Cabinet Width														
B = 17.5" Cabinet Width														
C = 21.0" Cabinet Width														
D = 24.5" Cabinet Width														
Heating Input														
080 = 80,000 MBTUH														
Major Design Change														
Voltage														
9 = 115 Volts / 60 Hertz / Natural Gas														
A = 115 Volts / 50 Hertz / Natural Gas														
C = 115 Volts / Natural Gas with Communicating System Control														
F = 115 Volts / Natural Gas with Integrated Electronic Filter														
D = 115 Volts / Natural Gas with Communicating System Control and Integrated Electronic Filter														
Air Capacity for Cooling														
36 = 3 Ton Standard PSC Motor														
H3 = 3 Ton High Efficiency Motor														
V3 = 3 Ton Variable Speed Motor														
Draft Inducer Speeds														
1 = Single Speed														
2 = Two Speed														
V = Variable Speed														
Minor Design Change														
Service Digit - Not Orderable														

## Coils – Residential


Refrigerant Type	4	T	X	C	B	0	0	1	C	C	3	H	C	A	A
4 - R410A															
Product Family															
T-Premium															
(Heat Pump or Convertible Coil)															
Coil Design															
X - Direct Expansion Evaporator Coil															
Product Family															
C - Cased A Coil															
A - Uncased A Coil															
F - Cased Horizontal Flat Coil															
Coil Width (Cased/Uncased)															
A - 14.5" / 13.3"															
B - 17.5" / 16.3"															
C - 21.0" / 19.8"															
D - 24.5" / 23.3"															
H - 10.5"															
Refrigerant Line Coupling															
0 - Brazed															
Model Number Distinguisher															
Major Design Change															
Efficiency															
C - Standard															
S - Hi Efficiency (Derived from 10 SEER products)															
Refrigerant Control															
3 - TXV - Non-Bleed															
Coil Circuitry															
H - Heat Pump															
Airflow Configuration															
A - Upflow Only															
U - Upflow / Downflow															
H - Horizontal Only															
C - Convertible - Upflow, Downflow, Left or Right Airflow															
Minor Design Change															
Unit Parts Identifier															

# Electrical Data

## Schematic Diagrams

(SEE LEGEND)

**4TWZ0024, 4TWZ0036, 4TWZ0048, 4TWZ0060**

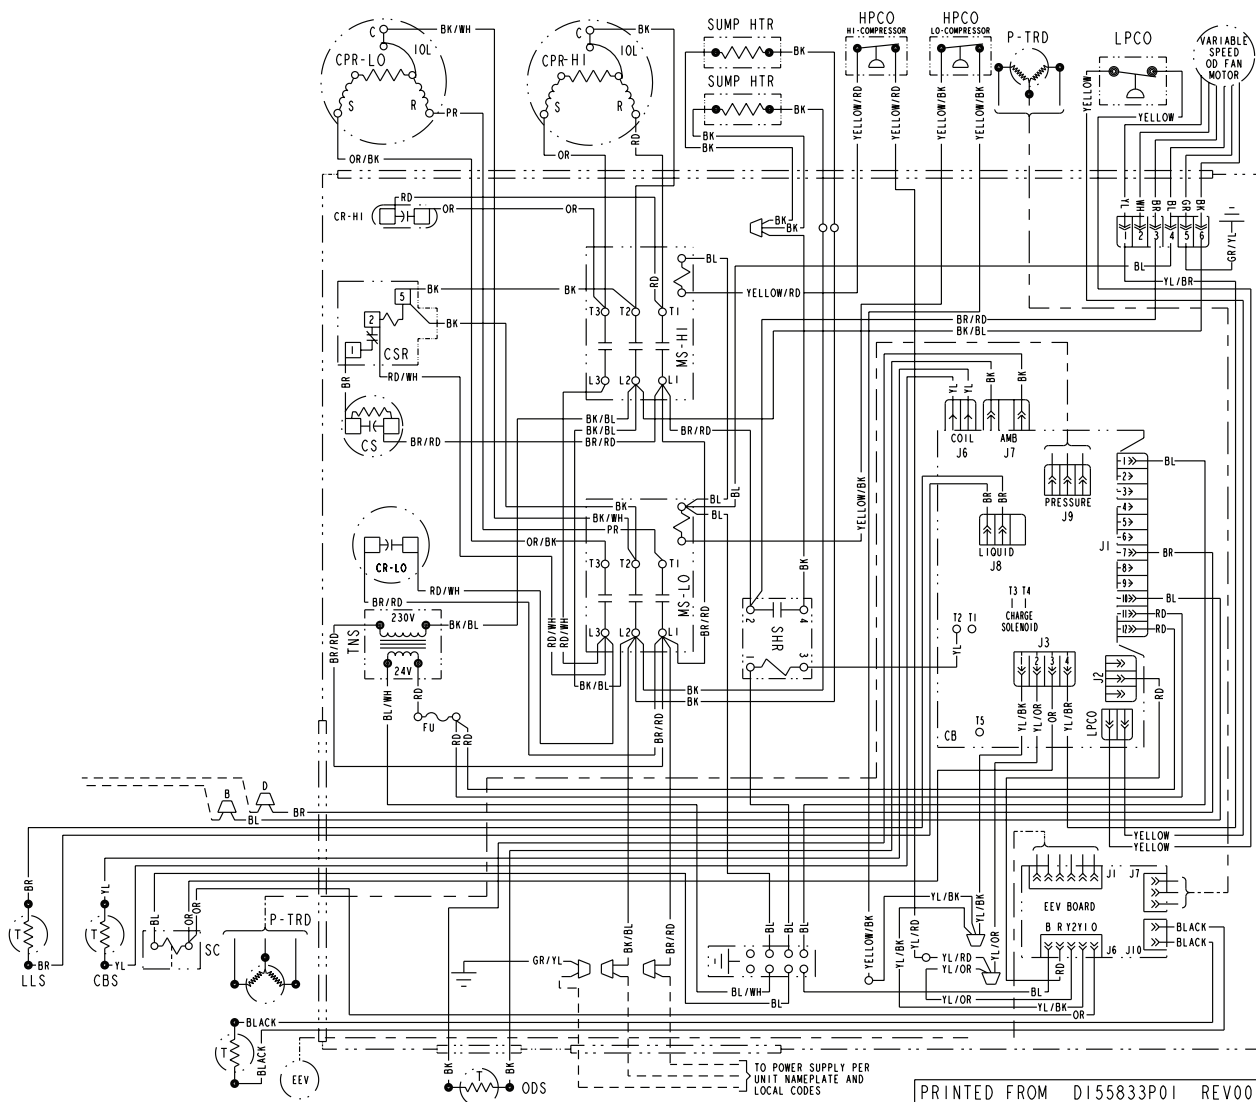




# Electrical Data

## Schematic Diagrams

(SEE LEGEND)

4TWZ0024, 4TWZ0036, 4TWZ0048, 4TWZ0060

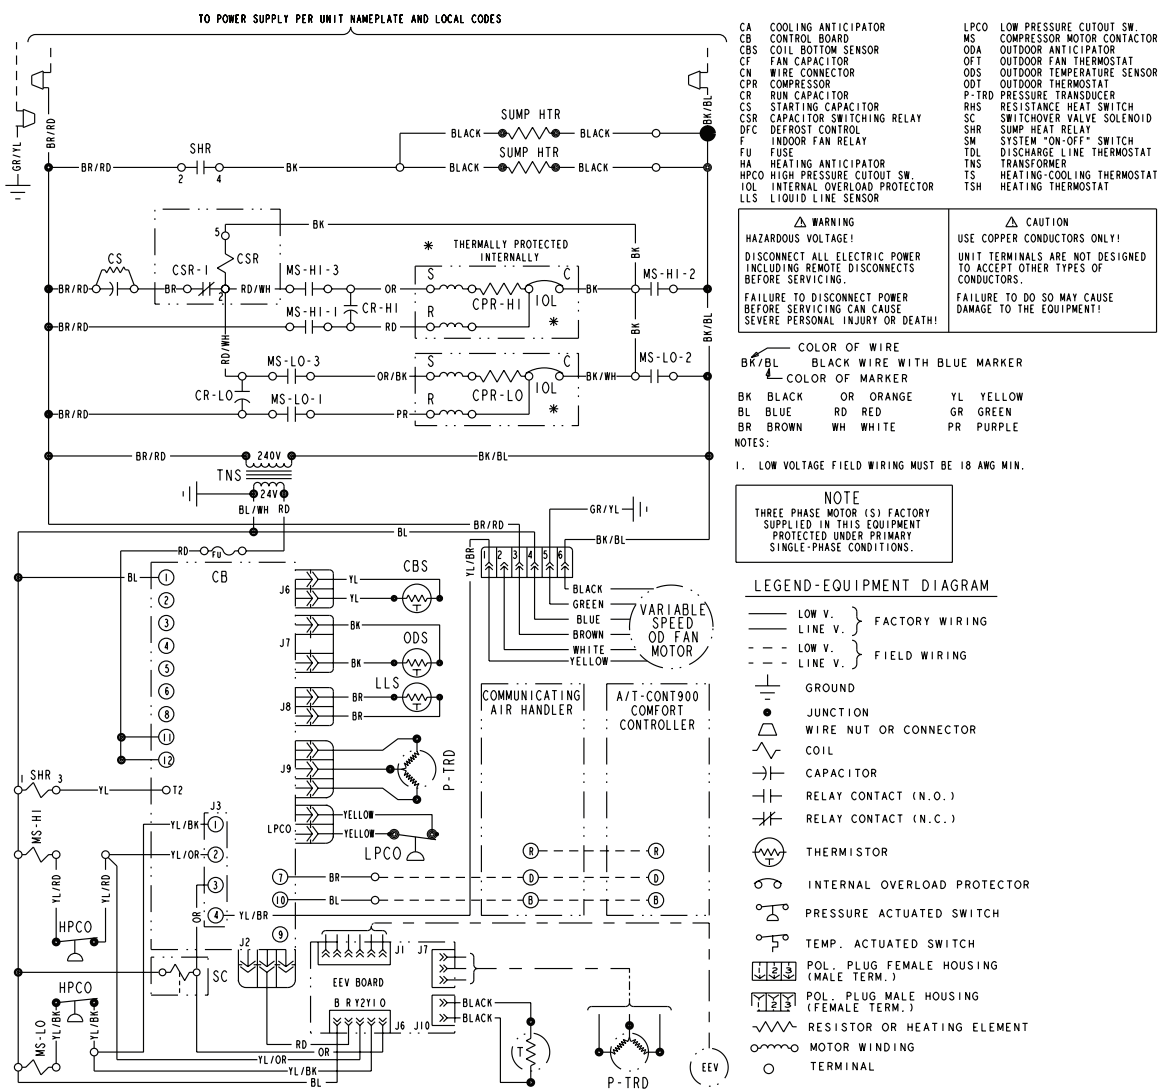



Printed from D155833P01 Rev 00























# Electrical Data

## Schematic Diagrams

### LEGEND

	COLOR OF WIRE				
BK/BL	BLACK WIRE WITH BLUE MARKER				
	COLOR OF MARKER				
BK	BLACK	OR	ORANGE	YL	YELLOW
BL	BLUE	RD	RED	GR	GREEN
BR	BROWN	WH	WHITE	PR	PURPLE

### SYMBOLS


	24 V.	}	FACTORY WIRING
	LINE V.		
	24 V.	}	FIELD WIRING
	LINE V.		
	GROUND		
	JUNCTION		
	WIRE NUT OR CONNECTOR		
	COIL		
	CAPACITOR		
	RELAY CONTACT (N.O.)		
	RELAY CONTACT (N.C.)		
	THERMISTOR		
	INTERNAL OVERLOAD PROTECTOR		
	PRESSURE ACTUATED SWITCH		
	TEMP. ACTUATED SWITCH		
	POL. PLUG FEMALE HOUSING (MALE TERM.)		
	POL. PLUG MALE HOUSING (FEMALE TERM.)		
	RESISTOR OR HEATING ELEMENT		
	MOTOR WINDING		
	TERMINAL		

CA	COOLING ANTICIPATOR	LPCO	LOW PRESSURE CUTOUT SW.
CBS	COIL BOTTOM SENSOR	MS	COMPRESSOR MOTOR CONTACTOR
CF	FAN CAPACITOR	ODA	OUTDOOR ANTICIPATOR
CN	WIRE CONNECTOR	OFT	OUTDOOR FAN THERMOSTAT
CPR	COMPRESSOR	ODS	OUTDOOR TEMPERATURE SENSOR
CR	RUN CAPACITOR	ODT	OUTDOOR THERMOSTAT
CS	STARTING CAPACITOR	RHS	RESISTANCE HEAT SWITCH
CSR	CAPACITOR SWITCHING RELAY	SC	SWITCHOVER VALVE SOLENOID
DFC	DEFROST CONTROL	SM	SYSTEM "ON-OFF" SWITCH
F	INDOOR FAN RELAY	TDL	DISCHARGE LINE THERMOSTAT
HA	HEATING ANTICIPATOR	TNS	TRANSFORMER
HPCO	HIGH PRESSURE CUTOUT SW.	TS	HEATING-COOLING THERMOSTAT
IOL	INTERNAL OVERLOAD PROTECTOR	TSH	HEATING THERMOSTAT

# Dimensions

## 4TWZ0 Outline Drawing

Note: All dimensions are in MM (Inches).

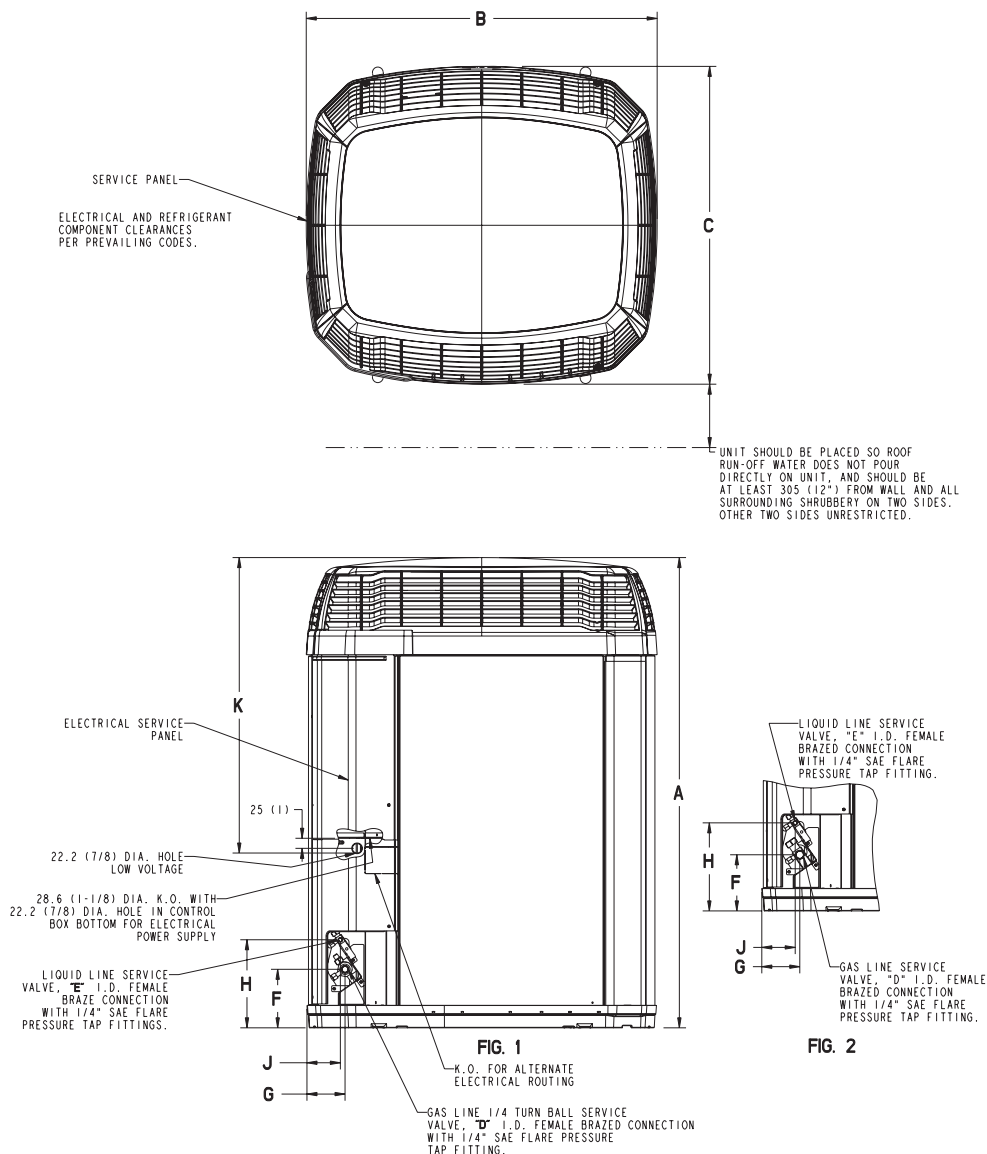

MODELS	BASE	A	B	C	D	E	F	G	H	J	K
4TWZ0024A	4	1369 (53 7/8)	946 (37-1/4)	870 (34-1/4)	5/8	3/8	152 (6)	98 (3-7/8)	219 (8-5/8)	86 (3-3/8)	1035 (40 3/4)
4TWZ0036A 4TWZ0048A 4TWZ0060A	4	1369 (53 7/8)	946 (37-1/4)	870 (34-1/4)	3/4	3/8	152 (6)	98 (3-7/8)	219 (8-5/8)	86 (3-3/8)	1035 (40 3/4)

# Mechanical Specification Options

---

## General

The 4TWZ0 is fully charged from the factory for matched indoor section and up to 15 feet of piping. This unit is designed to operate at outdoor ambient temperatures as high as 115°F. Cooling capacities are matched with a wide selection of air handlers and furnace coils that are A.R.I. certified. The unit is UL listed. Exterior is designed for outdoor application.

## ComfortLink™ II

This outdoor unit contains the ComfortLink™ II digital communication with 2 wire connection to outdoor and Plug-n-Play set up.

## Charge Assist™

The Charge Assist™ indicates system Charge Status.

## Casing

Unit casing is constructed of heavy gauge, G60 galvanized steel and painted with a weather-resistant powder paint on all louvers, panels, prepaint on all other panels. Corrosion and weather-proof CMBP-G30 DuraTuff™ base.

## Refrigerant Controls

Refrigeration system controls include condenser fan, compressor contactor and high and low pressure switches. High and low pressure controls are inherent to the compressor. A factory installed liquid line drier is standard.

## Compressor

The Climatuff® compressor features a 10 year limited warranty, internal over temperature and pressure protection and total dipped hermetic motor. Other features include: roto lock suction and discharge refrigerant connections, centrifugal oil pump and low vibration and noise.

## Condenser Coil

The outdoor coil provides low airflow resistance and efficient heat transfer. The coil is protected on all four sides by louvered panels and has a 10 year limited warranty.

## Low Ambient Cooling

As manufactured, this unit has a cooling capability to 55°F. For low ambient cooling below 55° see Application Guide SSC-APG005-EN.

## Comfort Control

ComfortLink™ II Control with Plug-n-Play set up and 3 wire connection.



**ARI Standard  
210/240 UHP**





Trane  
[www.trane.com](http://www.trane.com)

---

---

---

---

09/08

*Trane has a policy of continuous product and product data improvement **and** it reserves the right to change design and specifications without notice.*